

53 (2')

3000  
(10')  
standard  
max.

30500  
(100')  
custom  
max.

470  
(18.5')

600  
(23.6')

approx 24kg (53lb)

PENDANTS: twenty six

CANOPY: white powder-coated round canopy  
600mm (23.6") diameter

LAMPING: 20w xenon or 1.5w LED (LED not dimmable)

LENGTH OF COAX: determined by client 30550 (100') standard maximum

INSTALLATION: jack connected (pendant lengths set during production)

MATERIALS: raw porcelain glazed on one side, blown borosilicate glass,  
braided metal coaxial cable, silicon gaskets, electrical  
components and a white powder coated steel canopy

WEIGHT: approximately 24kg (53lb)

TRANSFORMERS: integral

#### DESCRIPTION

21.26 is a random configuration of twenty six 21 pendants hung from a round canopy. The drop lengths of the pendants are randomized between a client specified range of heights to variously cluster and scatter. The result is an ambient chandelier or field of light.

Inspired by the sporadic, perhaps discordant arrangement of barnacles on a rock surface, the 21 is fabricated from thin sheets of porcelain wrapped around frosted borosilicate glass trumpet-shaped diffusers. Each diffuser houses a low voltage (12V, 20W xenon) lamp. A strong contrast is established between the organically distributed soft light passing through the translucent white porcelain skin and the sharp, crisp light passing through the borosilicate glass diffuser.

#### NOTES

- + Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)
- + Unless otherwise noted when ordering, all chandeliers will be outfitted to be xenon compatible.
- + Note: As an alternative to a built-in transformer, Bocci recommends mounting transformers remotely in an easily accessible and hidden location for ease of long-term maintenance.

US patent # D556, 361 Worldwide patents issued and pending.  
Made in Vancouver, Canada

**BOCCI** Vancouver  
sales@bocci.ca  
www.bocci.ca

**BOCCI** Berlin  
europe@bocci.ca  
www.bocci.ca


ROUND

21.26

Design by Omer Arbel  
PRODUCT SPECIFICATION


Approved to UL standards by CSA



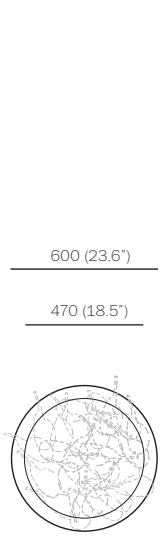

1

Measure and mark the chandelier canopy position on the ceiling.

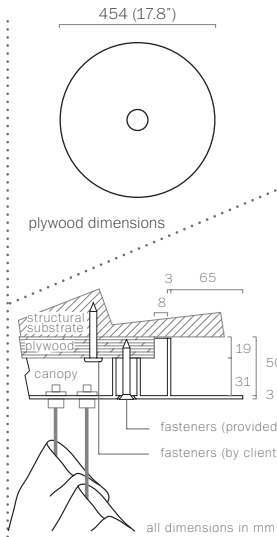


2

Note: The client is responsible for providing a robust 3/4" (19mm) plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility. Measure the plywood so that it fits within the canopy side walls (refer to detail above).

Anchor the plywood backing to the structural ceiling substrate.

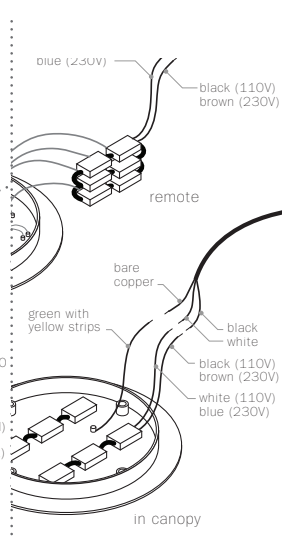


3

Connect transformers inside the canopy to line voltage. 110 V or 230 V depending on transformer.

For 110 V, connect black wire to the black wire and white wire to the white wire.

For 230 V, connect black wire to the brown wire and white wire to the blue wire.


Note: As an option, Bocci recommends mounting transformers remotely in a close, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to insure compliance with the code.



4


Anchor canopy into the plywood backing using the fasteners provided.

If your chandelier has multiple canopies, mount all canopies, one by one, per the previous steps. If your chandelier has only one canopy, proceed to step 5.



5

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert you index fingers into opposite sides of the roll then rotate your fingers in a spool like manner around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.

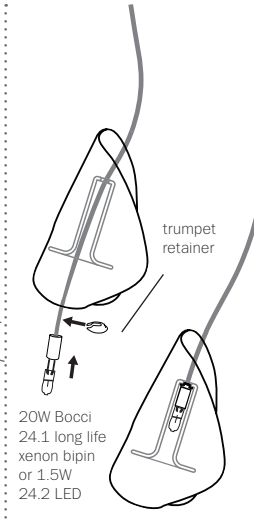

6


The 21 pendants are very fragile. Exercise extreme care while handling them.

Each pendant terminates in a "headphone jack" type connector, which plugs into a receiving receptacle in the canopy. Clients are encouraged to compose their own pendant configuration on site, thus creating a truly unique chandelier. After plugging in each pendant, turn the threaded sheathing into place by hand ensuring that it is adequately tightened. Tools are not required.

Once all of the coaxial cables are attached to the canopy, thread the coax through the shade, followed by the trumpet and finally slide on the trumpet retainer.

24.1.2 Bocci long-life bipin xenon lamps included.

Plug the lamps to the sockets. Do not touch the lamps with you bare hands. Carefully lower the assembly onto the lampholder.

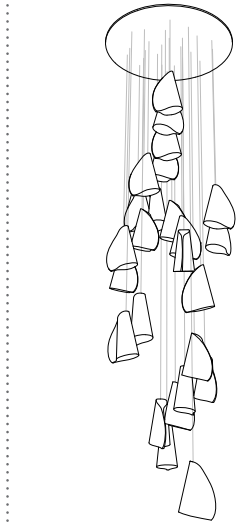

7

Turn fixture on.

Note: when using a dimmer, use only low voltage electronic dimmer.

Purchase replacement lamps online at [www.bocci.ca/lamps](http://www.bocci.ca/lamps)

For additional assistance:

**BOCCI** Vancouver  
info@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

**BOCCI** Berlin  
europe@bocci.ca  
[www.bocci.ca](http://www.bocci.ca)

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA



**BOCCI**