



Approved to UL standards by CSA

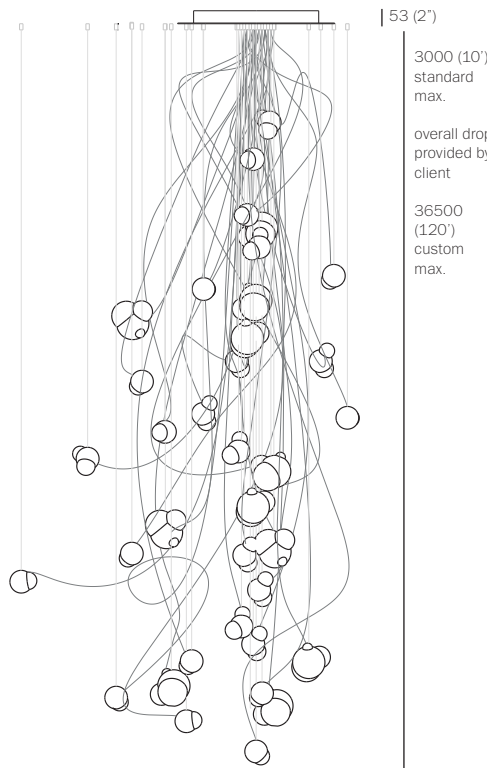

3000 (10')
standard
max.
overall drop
provided by
client
36500
(120')
custom
max.

±100-165 (4-6')

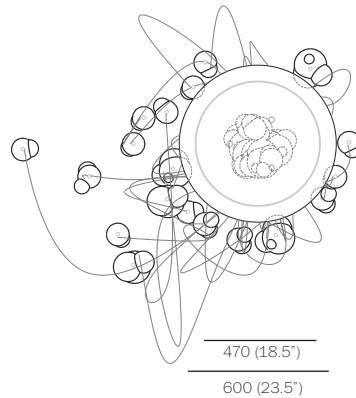

470 (18.5')
600 (23.5')

approx 78.9kg (173.9lb)

- PENDANTS: Thirty seven
- CANOPY: White powder-coated 600mm (23.5") diameter, 53mm deep
- LAMPING: 1.5w LED
- LENGTH OF COAX: 3000 (10') standard / 36500 (120') maximum
- INSTALLATION: Jack-connected (coax and drop lengths determined by client during production)
- MATERIALS: Blown and dipped glass, cast borosilicate glass cap, powder-coated steel and brass hardware, braided metal coaxial cable, aircraft cable, electrical components.
- WEIGHT: approximately 78.9kg (173.9lb)
- TRANSFORMERS: direct mounted (transformer is mounted in the canopy)

DESCRIPTION

This 57.37 designates a 57 series chandelier with 37 pendants mounted to a white-powder coated canopy. This chandelier is designed to be horizontal, meaning that the pendants don't hang directly below, but instead trail off across a space, around a corner or simply deviate from its gravitational directive. As such, this chandelier can be hung from a swag point mounted elsewhere from the canopy.

The 57 is a blown white and clear glass pendant dipped in coloured glass which houses a low voltage lamp. Individual pendants have a spatial presence on their own, but their strength lies in the ability to cluster them very close together in large cloud-like formations.

APPLICATIONS

The 57.37 is recommended for existing or newly built applications where the intent is to create a large cluster or cloud of pendants in a room.

Popular residential and commercial applications include large clusters in foyers and lobbies in both private and public spaces. Due to the horizontal nature of this chandelier, it can be spread far across a room with a lower ceiling height as well, such as a restaurant or lounge.

The length of coax as well as the drop of the pendant must be specified at production.

NOTES

- + Purchase replacement lamps online at www.bocci.ca/lamps
- + All chandeliers come with 1.5w LED lamps.
- + Requires composition of the coaxial cable.
- + Shortest and longest coax lengths specified by client with 10-20% additional length. Pendant drop lengths specified during production.


Worldwide patents issued and pending.
Made in Vancouver, Canada

BOCCI Vancouver
sales@bocci.ca
www.bocci.ca

BOCCI Berlin
europe@bocci.ca
www.bocci.ca


57.37

Design by Omer Arbel
PRODUCT SPECIFICATION

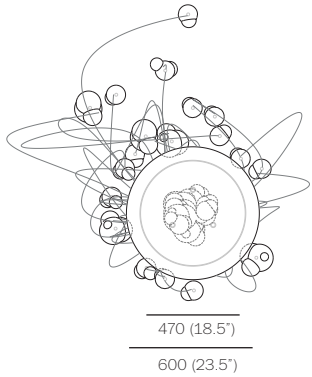

1

Measure and mark out the chandelier canopy position on the ceiling.




2

Note: The client is responsible for providing a robust 3/4" (19mm) plywood backing or wood blocking to securely anchor to the structural substrate.

Connections from the plywood to the structural substrate are the client's responsibility. Measure the plywood so that it fits within the canopy side walls (refer to detail above).


Anchor the plywood backing to the structural ceiling substrate.

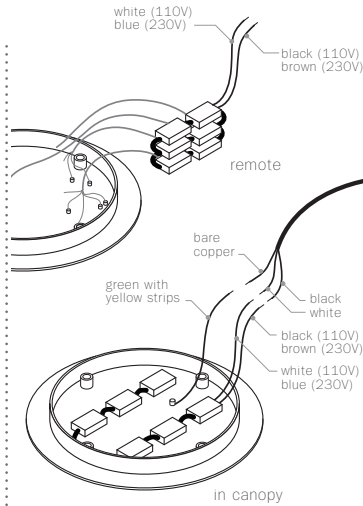

3

Connect transformers inside the canopy to line voltage, ensuring to match black wire to black wire and white to white. For the ground connection, connect the green wire with yellow stripe to the bare copper wire or green wire in the junction box.

Note: As an option, Bocci recommends mounting transformers remotely in a close by, accessible and hidden location for ease of long term maintenance. Installation to be done by certified personnel to ensure code compliance.



4


Anchor canopy into the plywood backing using the fasteners provided.



5

Determine the horizontal placement of the pendant and fasten the swag hook with the screw provided. The pendant will hang directly below this point.

Alternately, the connection points on the canopy can serve as hanging points for the pendant also.

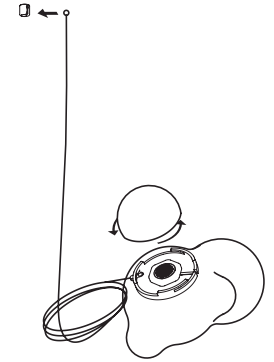


6

Remove the glass cap with a 1/4 turn counter-clockwise and set aside.

Locate ball-end of aircraft cable (drop length as ordered) and slip it into the swag hook, suspending the pendant.


If not using a swag hook, slip the ball end of the aircraft cable into the coax connection point on the canopy.

Note: throughout the installation, be mindful not to damage the glass cap and do not lose track of it, its size was chosen specifically for this pendant.




7

Very carefully uncoil the braided coaxial cable in a spool like manner. Insert your index fingers into opposite sides of the roll then rotate your fingers around each other to unroll the coaxial cable. Use patience: allow the cable to uncoil completely to avoid kinks.



8

Form a crook-shape in the coax right above the lampholder pinching it together over your index finger or thumb. The lampholder should be roughly 90 degrees to the rest of the length of coax.

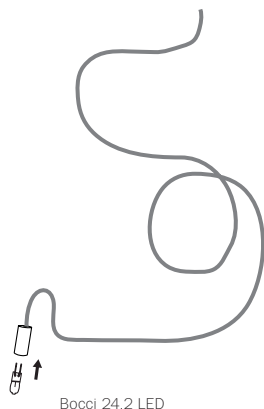


9

Bocci 24.2 LED lamps included.

Plug the lamp into the socket. Do not touch the lamp with your bare hands.


Purchase replacement lamps online at www.bocci.ca/lamps

Note: when using a dimmer, use only low voltage electronic dimmer to ensure the fixture works properly.

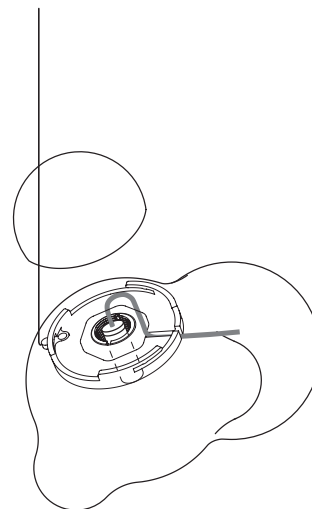

10


Insert the lampholder into the pendant through the hole in the center of the cap mount. Set it in such a way that the crook rests parallel to the cap mount and runs through the slot with the lampholder inside the pendant perpendicular to the cap mount.

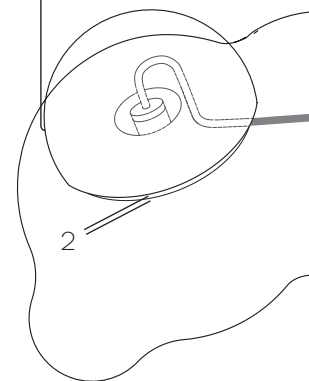

11

Put the cap back onto the pendant, ensuring that the coax remains seated in the slot. With a 1/4 turn, seal the cap on the cap mount.

DO NOT OVERTIGHTEN. There should be a 2mm gap between the cap and the pendant with the coax emerging from inside.

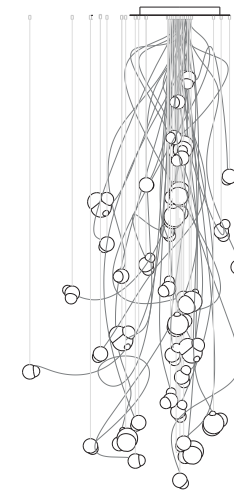

12

Clean fingerprints from glass surfaces.

Turn fixture on.

*

For additional assistance, please contact Bocci:

BOCCI Vancouver
info@bocci.ca
www.bocci.ca

BOCCI Berlin
infoeu@bocci.ca
www.bocci.ca

Worldwide patents issued and pending.

US patent # US D556,361

Made in Vancouver, Canada

Approved to UL standards by CSA

