

INDOOR




SOFFITTO / CEILING

BEAM MASTER Ø60 ZUMMY




Alluminio
Fascio di luce orientabile
Driver: escluso

Aluminum
 Light beam: adjustable
 Driver: excluded

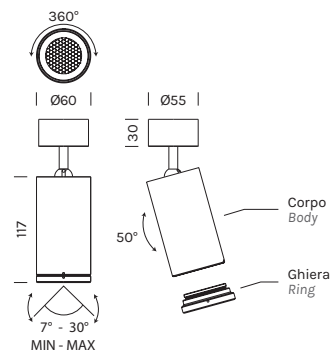

Corpo (ghiera esclusa) / Body (ring excluded)

4314	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 8,5W	1x 8,5W	1x 8,5W
Lumen	1x 1034 lm	1x 1076 lm	1x 1104 lm
CRI	97	97	97
Alimentazione/ Supply	24Vdc	24Vdc	24Vdc




Articolo Item	Temperatura Temperature	Finitura Finish
4314	M	-BO
	W	-NO
	N	-BV
		-OR
		-RR
		-TI

Ghiera / Ring

Filtro anti-abbagliamento incluso

Antiglare filter included



Articolo Item	Finitura Finish
414	-BO
	-BV
	-NO
	-OR
	-RR
	-TI

Alimentatori 24Vdc in tensione in remoto / Remote constant voltage drivers 24Vdc

Articolo Item	Potenza Power	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
1A0150	30W	160x58x18	1-2
1A0151	50W	160x58x18	1-3
1A0152	75W	160x58x18	1-4
1A0145	100W	190x52x37	1-6
1A0153	150W	240x60x49	1-9

Centraline dimmerabili in remoto / Remote dimmable controllers

Articolo Item	Potenza Power	Dimensioni Dimensions
1A0837	120W MAX	132x22x19
1A0838	240W MAX	156x47x26
1A0172	240W MAX	57x43x19