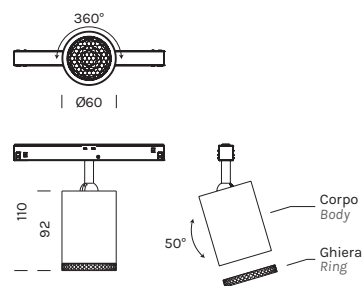


BINARIO 48V / TRACK 48V


BEAM MASTER TRACK 48V Ø60

Alluminio
Fascio di luce orientabile
Driver: escluso

Aluminum
Light beam: adjustable
Driver: excluded

**Corpo per binario PLAFONE (ghiera esclusa) / Body for CEILING track (ring excluded)**


4322	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 8,5W	1x 8,5W	1x 8,5W
Lumen	1x 1034 lm	1x 1076 lm	1x 1104 lm
CRI	97	97	97
Alimentazione/ Supply	48Vdc	48Vdc	48Vdc



Articolo Item	Temperatura Temperature	°Optica °Optic	Colore jack Jack color	Finitura Finish
4322	M	12	-JBI	-BO
	W	35	-JNE	-NO
	N	55		-BV
				-OR
				-RR
				-TI

Corpo per binario INCASSO (ghiera esclusa) / Body for BUILT-IN track (ring excluded)

4922	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 8,5W	1x 8,5W	1x 8,5W
Lumen	1x 1034 lm	1x 1076 lm	1x 1104 lm
CRI	97	97	97
Alimentazione/ Supply	48Vdc	48Vdc	48Vdc




Articolo Item	Temperatura Temperature	°Optica °Optic	Colore jack Jack color	Finitura Finish
4922	M	12	-JBI	-BO
	W	35	-JNE	-NO
	N	55		-BV
				-OR
				-RR
				-TI

Ghiera / Ring

Filtro anti-abbagliamento incluso

Antiglare filter included



Articolo Item	Finitura Finish
412	-BO 
	-BV 
	-NO 
	-OR 
	-RR 
	-TI 

Alimentatori 48Vdc in tensione / Constant voltage drivers 48Vdc

Articolo Item	Potenza Power	Dimensioni Dimensions	N° art. alimentabili N° of items powerable
1A0633	70W	225x60x36	1-4
1A0634	150W	225x60x36	1-9