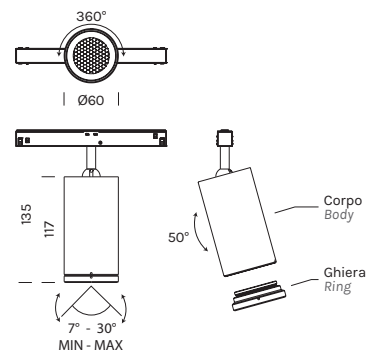


BINARIO 48V / TRACK 48V


**BEAM MASTER TRACK 48V Ø60 ZUMMY**

Alluminio  
Fascio di luce orientabile  
Driver: escluso

Aluminum  
Light beam: adjustable  
Driver: excluded

**Corpo per binario PLAFONE (ghiera esclusa) / Body for CEILING track (ring excluded)**


| 4324                  | M 2700°K   | W 3000°K   | N 4000°K   |
|-----------------------|------------|------------|------------|
| Potenza/ Power        | 1x 8,5W    | 1x 8,5W    | 1x 8,5W    |
| Lumen                 | 1x 1034 lm | 1x 1076 lm | 1x 1104 lm |
| CRI                   | 97         | 97         | 97         |
| Alimentazione/ Supply | 48Vdc      | 48Vdc      | 48Vdc      |



| Articolo<br>Item | Temperatura<br>Temperature | Colore jack<br>Jack color | Finitura<br>Finish |
|------------------|----------------------------|---------------------------|--------------------|
| 4324             | M                          | -JBI                      | -BO                |
|                  | W                          | -JNE                      | -NO                |
|                  | N                          |                           | -BV                |
|                  |                            |                           | -OR                |
|                  |                            |                           | -RR                |
|                  |                            |                           | -TI                |

**Corpo per binario INCASSO (ghiera esclusa) / Body for BUILT-IN track (ring excluded)**

| 4924                  | M 2700°K   | W 3000°K   | N 4000°K   |
|-----------------------|------------|------------|------------|
| Potenza/ Power        | 1x 8,5W    | 1x 8,5W    | 1x 8,5W    |
| Lumen                 | 1x 1034 lm | 1x 1076 lm | 1x 1104 lm |
| CRI                   | 97         | 97         | 97         |
| Alimentazione/ Supply | 48Vdc      | 48Vdc      | 48Vdc      |



| Articolo<br>Item | Temperatura<br>Temperature | Colore jack<br>Jack color | Finitura<br>Finish |
|------------------|----------------------------|---------------------------|--------------------|
| 4924             | M                          | -JBI                      | -BO                |
|                  | W                          | -JNE                      | -NO                |
|                  | N                          |                           | -BV                |
|                  |                            |                           | -OR                |
|                  |                            |                           | -RR                |
|                  |                            |                           | -TI                |

## Ghiera / Ring

Filtro anti-abbagliamento incluso

Antiglare filter included



| Articolo<br>Item | Finitura<br>Finish |
|------------------|--------------------|
| <b>414</b>       | <b>-BO</b>         |
|                  | <b>-BV</b>         |
|                  | <b>-NO</b>         |
|                  | <b>-OR</b>         |
|                  | <b>-RR</b>         |
|                  | <b>-TI</b>         |

## Alimentatori 48Vdc in tensione / Constant voltage drivers 48Vdc

| Articolo<br>Item | Potenza<br>Power | Dimensioni<br>Dimensions | N° art. alimentabili<br>N° of items powerable |
|------------------|------------------|--------------------------|-----------------------------------------------|
| <b>1A0633</b>    | 70W              | 225x60x36                | 1-4                                           |
| <b>1A0634</b>    | 150W             | 225x60x36                | 1-9                                           |