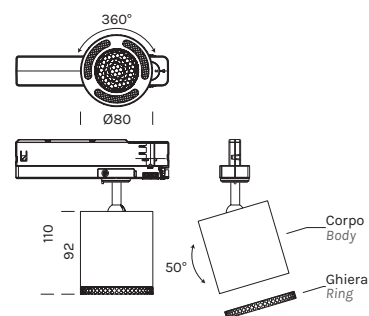


BINARIO 230V / TRACK 230V


BEAM MASTER TRACK 230V Ø80

Alluminio
Fascio di luce orientabile

Aluminum
Light beam: adjustable

**Corpo per binario PLAFONE (ghiera esclusa) / Body for CEILING track (ring excluded)**

4938	M 2700°K	W 3000°K	N 4000°K
Potenza/ Power	1x 12,3W	1x 12,3W	1x 12,3W
Lumen	1x 1413 lm	1x 1470 lm	1x 1507 lm
CRI	97	97	97
Alimentazione/ Supply	230Vac	230Vac	230Vac



Articolo Item	Temperatura Temperature	°Ottica °Optic	Colore jack Jack color	Finitura Finish
4938	M	12	-JBI	-BO
	W	35	-JNE	-NO
	N	55		-BV
				-OR
				-RR
				-TI

Ghiera / Ring

Filtro anti-abbagliamento incluso

Antiglare filter included



Articolo Item	Finitura Finish
413	-BO
	-BV
	-NO
	-OR
	-RR
	-TI