


STAGE HORIZONTAL SILENCE



Ferro, lamierino microforato fonoassorbente
Fascio di luce verso il basso
Driver: incluso

Iron, microperforated soundabsorbing metal-sheet
 Light beam: downward-projected
 Driver: included

6711	W 3000°K	N 4000°K	T 2700°K/6500°K
Potenza/ Power	1x 44W	1x 44W	1x 33W
Lumen	1x 6390 lm	1x 6718 lm	1x 5060/5480 lm
CRI	>90	>90	>90
Alimentazione/ Supply	220-240Vac	220-240Vac	220-240Vac

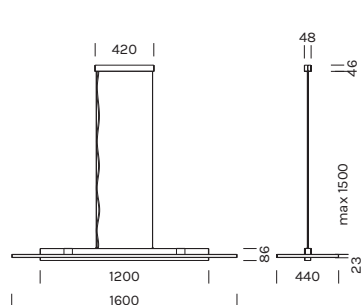

Articolo Item	Temperatura Temperature	Finitura Finish	Dimmer Dimmer
6711	W N	-NO	-
6711	T	-NO	PUSH DALI DT8

Kit Cavi extra / Extra cable kit

	Articolo Item	Lunghezza Lenght
kit cavi trasparenti Transparent cables kit	CK-300-01	3000
kit cavi trasparenti Transparent cables kit	CK-500-01	5000