




Model Sheet

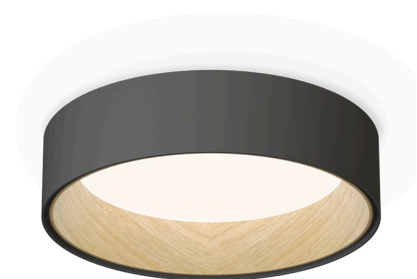

Finish	 18 Graphite ADAPTA RF 9913 WX
	 93 White RAL 9016
	 58 Cream RAL 7044
LED temperature color	2700 K / 3500 K / 4000 K
Dimming	Casambi / Push; 1-10V; DALI-2

Installation type	Surface Canopy
-------------------	----------------

Materials	Shade: Wood
Light source	1 x LED PLATE 26W 500mA 
LED	CRI>90 2206 lm 98 2700 K / 3500 K / 4000 K
Driver	Constant Current 500 110~240 V V 50~60 Hz HZ




Application	Ceiling Lamps
Packaging	1 Box 0.558 m x 0.558 m x 0.255 m Gross weight 7 Net weight 6 Vol. 0.0793



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data



Other Applications

