
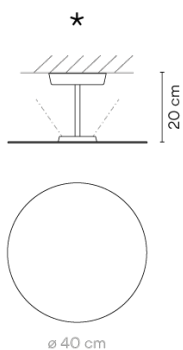


Model Sheet



Finish	13 Off-White NCS S 1000-N
	47 Green L1 NCS S 4005-G80Y
	10 White NCS S 0300-N

LED temperature color 2700 K / 3500 K

Dimming Push; 1-10V / DALI

Installation type Surface Canopy

Materials Ceiling rose: Steel
Reflector: Aluminum
Body: Steel
Head: Aluminium

Light source 1 x LED PLATE 13,5W 700mA



LED CRI>90 1740 lm 128.88
2700 K / 3500 K

Driver Constant Current 700 110~240
V V 50~60 Hz HZ




Application Ceiling Lamps

Packaging 1 Box
0.71 m x 0.71 m x 0.13 m
Gross weight 3.1
Net weight 1.91
Vol. 0.0655



Lighting effect

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.



Photometric Data



Efficiency 76.48 lm/W
Coordinate System CG
Total Flux 1126.58 lm
Maximum Value 468.59 cd

Other Applications

