



5955

Design By Ichiro Iwasaki

The Flat floor lamp offers multiple functionality; material and light are integrated in a single body. The Flat collection contains various planes of light that rise up to become self-illuminating supports.

Model Sheet

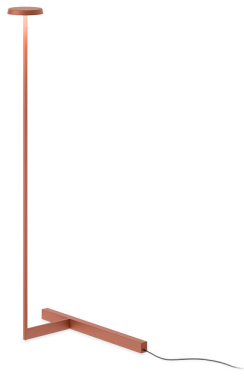

Finish

- 47 Green L1
NCS S 4005-G80Y
- 11 Black
NCS S 8500-N
- 37 Terra Red
NCS S 4040-Y70R

LED temperature color 2700 K / 3500 K

Dimming Push

Installation type Plug-in

Materials

- Body: Steel
- Base: Steel
- Head: Aluminium
- Reflector: Aluminum

Light source 1 x LED PLATE 7W 400mA



LED CRI>90 1200 lm 171.4
2700 K / 3500 K

Driver Constant Current 400
100~240 V V 50~60 Hz HZ

Remarks 24V transformer at plug

F Dimmer LED
 IP20 Bi-volt 50-60Hz PUSH

Application Floor Lamps


Packaging

- 1 Box
- 0.37 m x 0.51 m x 1.12 m
- Gross weight 5.3
- Net weight 3.5
- Vol. 0.2113



Lighting effect

Indirect lighting

Lamp that emits an upward or backward beam that is reflected by the ceiling or wall.




Photometric Data

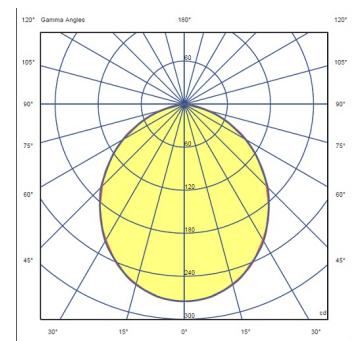

Efficiency 76.96 lm/W
Coordinate System CG
Total Flux 682.09 lm
Maximum Value 275.02 cd

Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com