

Halo wall


VIBIA

2362

Design By Martín Azúa

Wall sconce. The light rods, anchored to an aluminium profile are arranged around a central perpendicular axis, in parallel or angled. The modular character allows for large interconnected lights murals to be configured.

Model Sheet

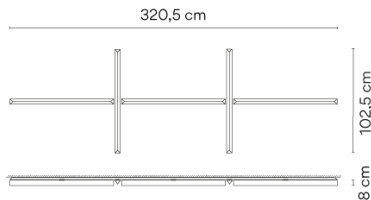


Finish	11 Black NCS S 8500-N 13 Warm White NCS S 1000-N
LED temperature color	2700 K / 3000 K
Dimming	1-10V / DALI
Installation type	Surface Canopy
Materials	Diffuser: PMMA LED support: Aluminum Wall support: Aluminum
Light source	5 x LED STRIP 24V 15,3W A+
LED	CRI>80 7640.2 lm 99.87 2700 K / 3000 K
Driver	Constant Voltage 220~240 V V 50~60 Hz HZ
Remarks	Surface ⚡ F Dimmable LED IP20 50-60Hz 1-10V
Application	Wall Lamps
Packaging	1 Box 3.3 m x 0.168 m x 0.16 m Gross weight 14 Net weight 9 Vol. 0.0887



Lighting effect

General lighting

Lamp for general lighting that equally distributes the light in all directions.



Photometric Data



Other Applications



All of our products come with a five-year warranty. Check our legal terms at www.vibia.com/warranty

Vibia Lighting, S.L.U.

Office / Oficina
Progrés 4-6. 08850 Gavà. Barcelona, Spain.

International T +34 934 796 971
Spain / Portugal T +34 934 796 970

customer.service@vibia.com
vibia.com