



DESCRIPTION

The Beak Suspension's adjustable cylinder directs and projects a beam of direct light. Its smooth, burnished brass finish is accented by knurling on the head, adding visual rhythm to the structure. Supported by a central rod that lends verticality to the composition, Beak Suspension is available in both a standard and Flat version with a reduced-thickness canopy. The Beak collection also includes Ceiling, Wall, Floor, and Table models.

PRODUCTS DETAILS	FUNCTION	SUSPENSION
	LOCATION	INTERIOR
	LIGHT EMISSION	DIRECTIONAL LIGHT
	LIGHT SOURCE	COB LED CLU703 6W 724lm 700mA 9V CRI90 2700°K
	ENERGY EFFICIENCY	F
	RATED VOLTAGE	110 - 120 V / 220 - 240 V
	FREQUENCY	50 - 60Hz
	SUPPLY	BEAK SUSPENSION TERMINAL BLOCK
		BEAK SUSPENSION FLAT REMOTE TERMINAL BLOCK
	LENS SPOT BEAM	18° - 36° - 60°

BEAK SUSPENSION: DALI OR TRIAC DIMMING KIT AVAILABLE UPON REQUEST.
BEAK SUSPENSION FLAT: DALI OR TRIAC REMOTE DIMMING KIT AVAILABLE UPON REQUEST.

CERTIFICATION

UL /     IP20


MATERIALS	STRUCTURE	
	M11	LIGHT BURNISHED BRASS
	M12	DARK BURNISHED BRASS

PACKAGE	QTY	DIMENSIONS	NET WEIGHT	GROSS WEIGHT	TOTAL VOL.
	-	-	-	-	-


DIMENSIONS

BEAK SUSPENSION

STANDARD

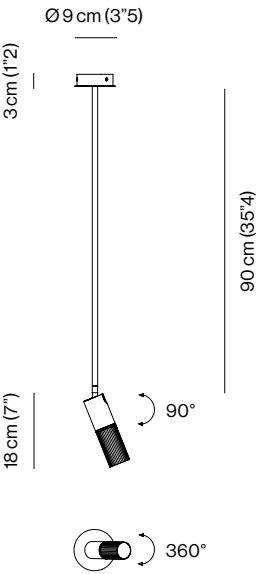


J-BOX KIT

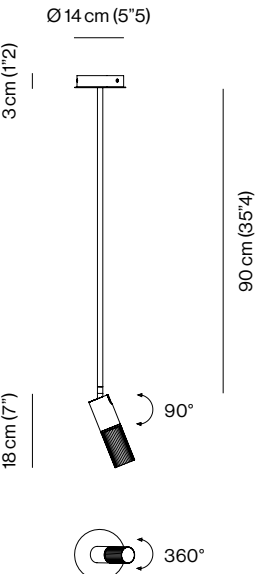

BEAK SUSPENSION FLAT

STANDARD

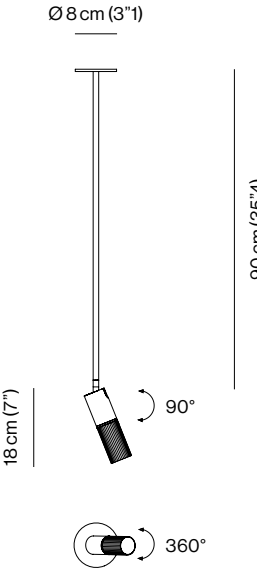

J-BOX KIT

